





# LAYERING Potter's Choice

# Celadon


Cone 5/6




PC-2 Saturation Gold over C-19 Glacier





PC-4 Palladium over C-19 Glacier




PC-20 Blue Rutile over C-19 Glacier




PC-21 Arctic Blue over C-19 Glacier




PC-23 Indigo Float over C-19 Glacier





PC-24 Sapphire Float over C-19 Glacier




PC-25 Textured Turquoise over C-19 Glacier




PC-27 Tourmaline over C-19 Glacier



PC-28 Frosted Turquoise over C-19 Glacier



PC-31 Oatmeal over C-19 Glacier



Conforms to  
ASTM D-4236

PC-32 Albany Slip Brown over C-19 Glacier

Clay: AMACO® A-Mix White Stoneware No. 11

**C-19 Layering Notes:** Brush on three layers of base coat. Brush on three layers of top coat. (Let dry between coats.)

**Firing:** Test tiles have been fired to Cone 6

over  
**C-19**  
Glacier

[www.LayeringAmacoGlazes.com](http://www.LayeringAmacoGlazes.com)




Join the conversation  
[www.facebook.com/groups/potterschoiceex](http://www.facebook.com/groups/potterschoiceex)

Reorder No. 116175



PC-33 Iron Lustre over C-19 Glacier

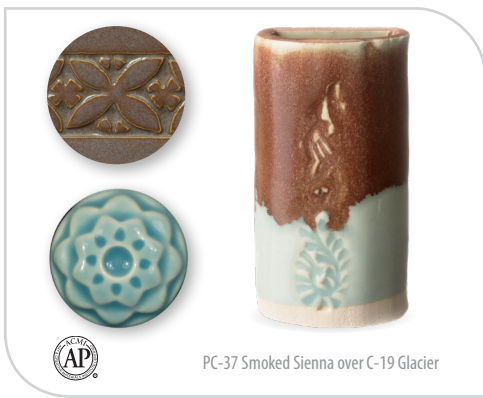

PC-37 Smoked Sienna over C-19 Glacier



PC-39 Umber Float over C-19 Glacier



PC-42 Seaweed over C-19 Glacier



PC-44 Sage over C-19 Glacier



PC-45 Dark Green over C-19 Glacier



PC-46 Lustrous Jade over C-19 Glacier



PC-48 Art Deco Green over C-19 Glacier



PC-52 Deep Sienna Speckle over C-19 Glacier



PC-55 Chun Plum over C-19 Glacier



PC-57 Smokey Merlot over C-19 Glacier



PC-59 Deep Firebrick over C-19 Glacier



PC-63 Cosmic Tea Dust over C-19 Glacier



PC-64 Aventurine over C-19 Glacier



The Art & Creative Materials Institute AP (Approved Product) seal certifies this product to be safe for use by all ages. Conforms to ASTM D-4236.



The Art & Creative Materials Institute CL (Caution Label) seal restricts this product from children under the age of 13. Older users must follow all cautionary labeling. Conforms to ASTM D-4236.

Color may vary between printed copies.